



# Fats & Grease Trap - 2H Tanks (5,000 L) - IS EN 1825 Compliant

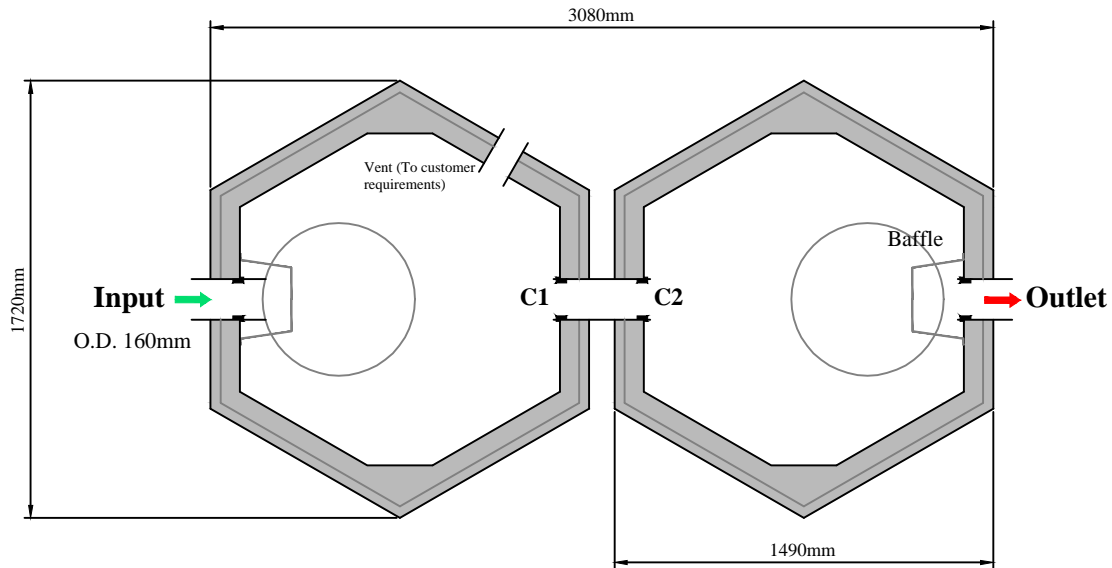

10 lit./sec nominal flow @  $\leq 60^{\circ}\text{C}$   
 1,200 lit. Grease retention  
 1,200 lit. Sludge capacity

An anti-syphon vent is required for long run outflows

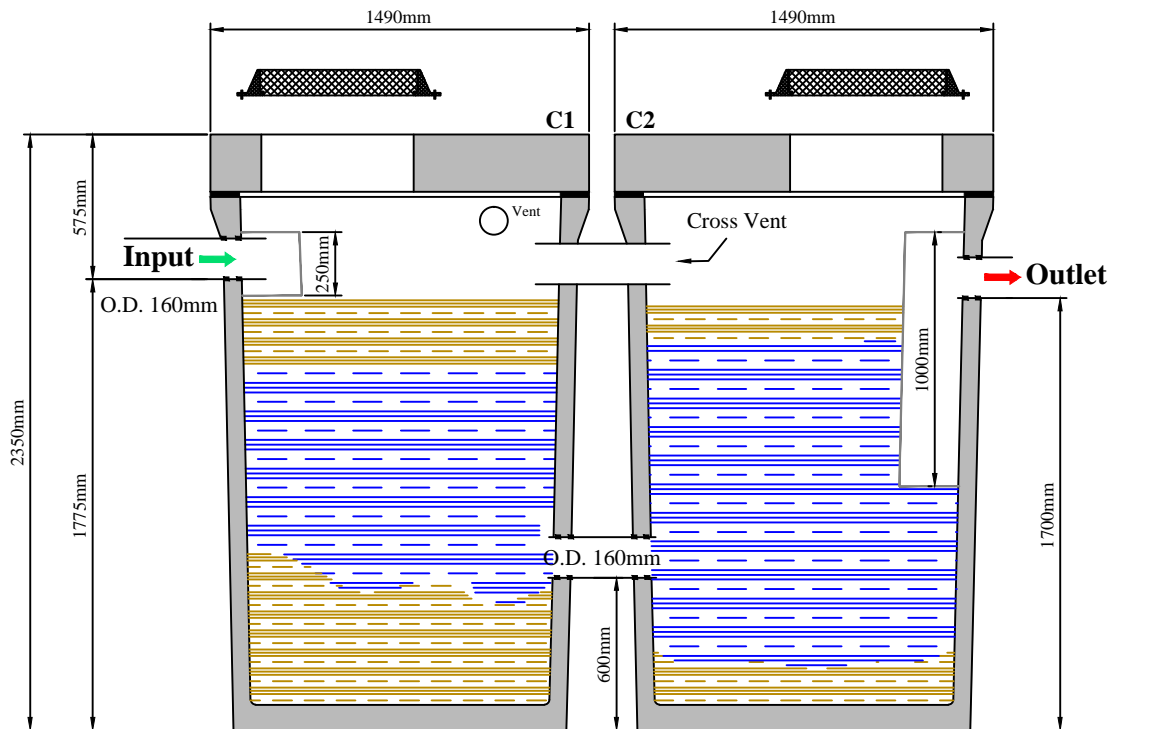

A good firm, rock free, level base is required.



Clara Road, Tullamore, Co. Offaly, Ireland  
 Tel: 057 9326000 info@molloyprecast.com  
 Fax: 057 9326060 www.molloyprecast.com

Note: Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.  
 Note: Specify any specific requirements prior to ordering. All civil works by customer.  
 Note: Do not scale from this drawing. Only for illustration purposes.

Tank Type: 2H  
 Tank Size: 3080mm x 1720mm  
 Height: 2350mm  
 Volume: 5000 liters  
 Weight: 3000kg  
 (Tank Dim:  $\pm 20\text{mm}$ . Weight:  $\pm 30\text{Kg}$ .)

Title: Grease Trap 2H NS-10  
 Nominal Size: 10 litres/sec  
 Date: June 2012  
 Drg. No.: FG-NS-10-00  
 Drawn By: MFC  
 This drawing is ©. All rights reserved.