


Bypass NSB - 006 - HH - 6" class 1 interceptor Volume 5,000 lit


**6 l/s nominal flow.
60 l/s peak flow.
3,333sq. coverage.
400 lit. emergency oil retention.
1,000 lit. sludge capacity.**

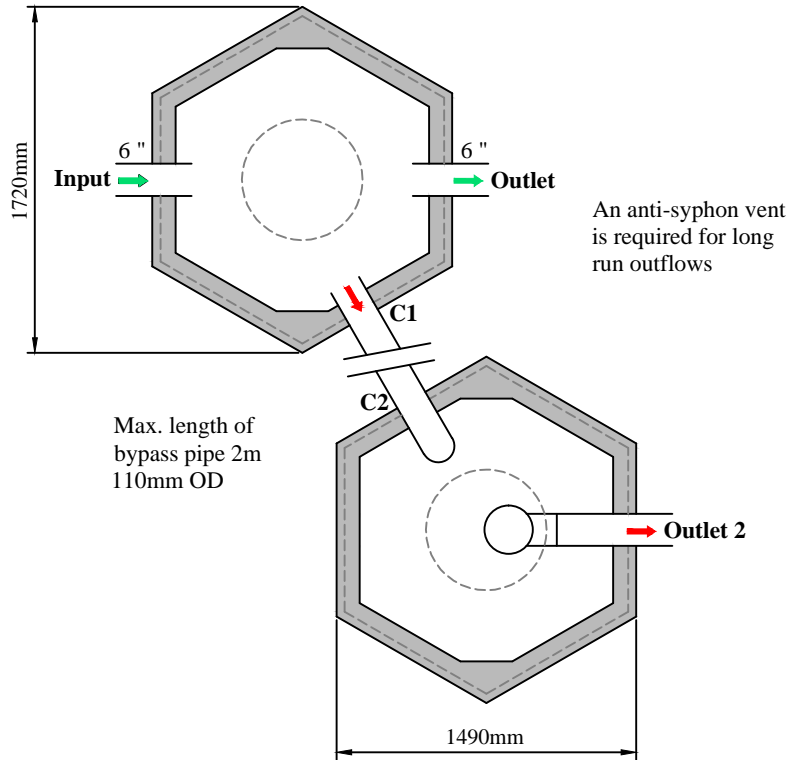

Max. length of bypass pipe 2m
110mm OD

All the tanks must be placed on a perfectly level and firm suitable base.

Typical layout, variations as required per customer.

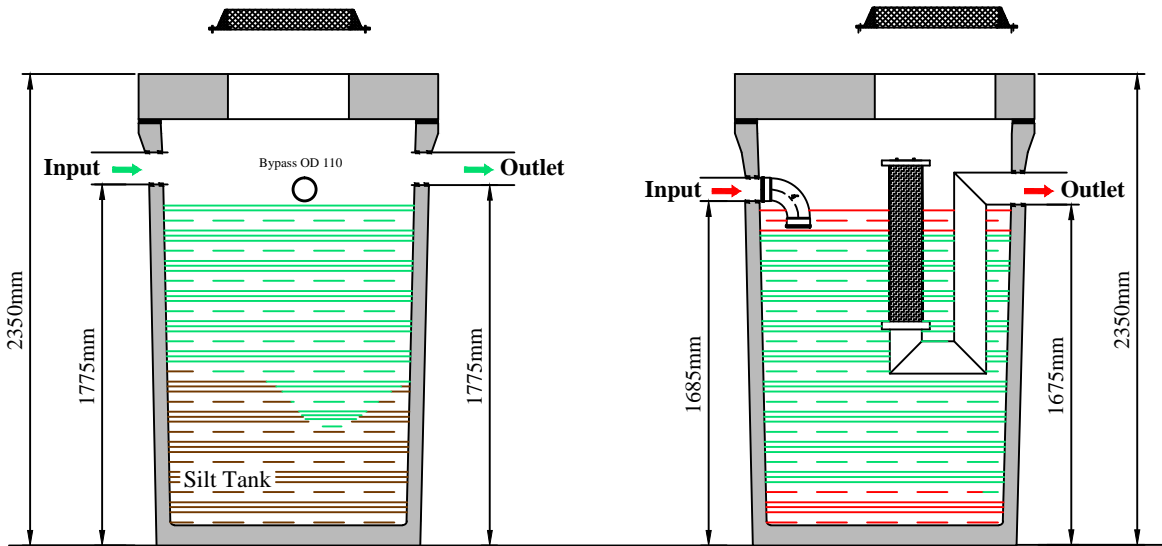

Clara Road, Tullamore, Co. Offaly, Ireland
Tel: 057 9326000 info@molloyprecast.com
Fax: 057 9326060 www.molloyprecast.com

Note: Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.
Note: Specify any specific requirements prior to ordering. All civil works by customer.
Note: Do not scale from this drawing. Only for illustration purposes.

Tank Type: 2H Bypass Interceptor	Title: NSB-006-HH
Tank Size: 1720mm x 1490mm	Bypass Interceptor
Height: 2350mm	Date: June 2012
Volume: 2500 liters (Each)	Dr. No.: NSB-006-HH-00
Weight: 1500kg (Each, Ex. Lid)	Drawn By: SC
(Tank Dim: ± 20mm. Weight: ± 30Kg.)	This drawing is ©. All rights reserved.