



**Bypass NSB - 010 - HHH - 9" class 1 interceptor Volume 7,500 lit**

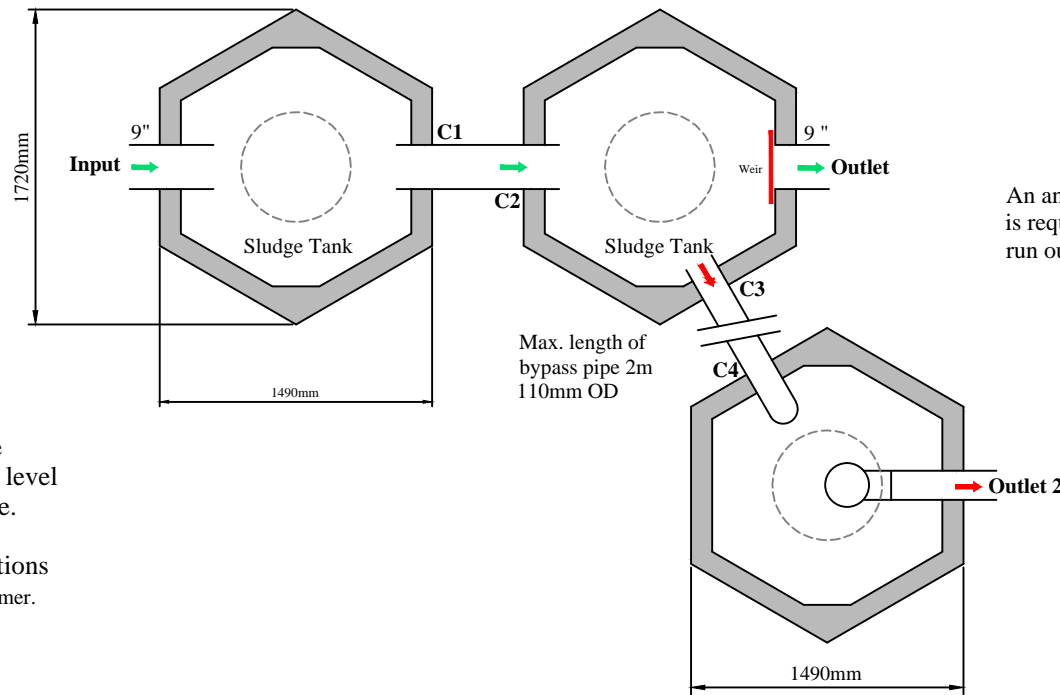

An anti-syphon vent is required for long run outflows

All the tanks must be placed on a perfectly level and firm suitable base.

Typical layout, variations as required per customer.

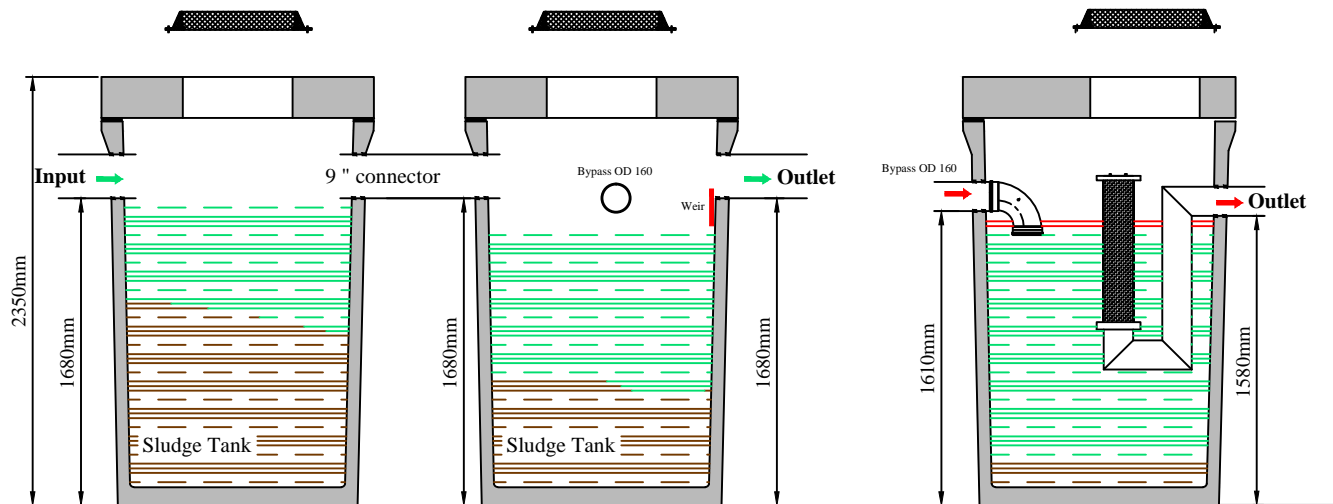

**Notes:**

This drawing is ©. All rights reserved.  
**Note:** Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.  
**Note:** Specify any specific requirements prior to ordering. All civil works by customer.  
**Note:** Do not scale from this drawing. Only for illustration purposes.

**Tank Type:** 3H Bypass Interceptor  
**Tank Size:** 1720mm x 1490mm (Each)  
**Height:** 2350mm  
**Volume:** 2500 liters (Each)  
**Weight:** 1500kg (Each, Ex. Lid)  
**(Tank Dim: ± 20mm. Weight: ± 30Kg.)**

**10 l/s nominal flow**  
**100 l/s peak flow**  
**5,555m. sq. coverage**  
**1,150 lit. sludge capacity**  
**400 lit. emergency oil retention**



Clara Road, Tullamore, Co. Offaly, Ireland  
 Tel: 057 9326000 info@mollyprecast.com  
 Fax: 057 9326060 www.mollyprecast.com

**Title:** NSB-010-HHH  
**Bypass Interceptor**  
**Date:** June 2012  
**Drg. No.:** NSB-010-HHH-00  
**Drawn By:** SC