


Forecourt Class 1 En 858 Industrial Interceptor FC - NS - 10 - CC Buderus

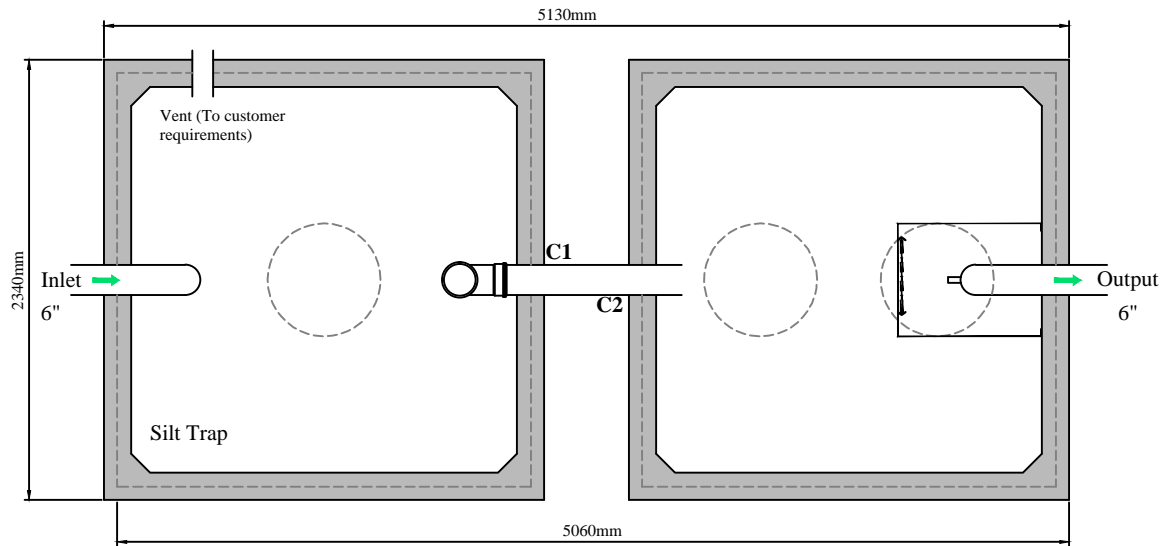


All the tanks must be placed on a perfectly level and firm suitable base.

Typical layout, variations as required per customer.

The bypass may only join the main drain after a 110mm drop in level has occurred.

An anti-syphon vent is required for long run outflows

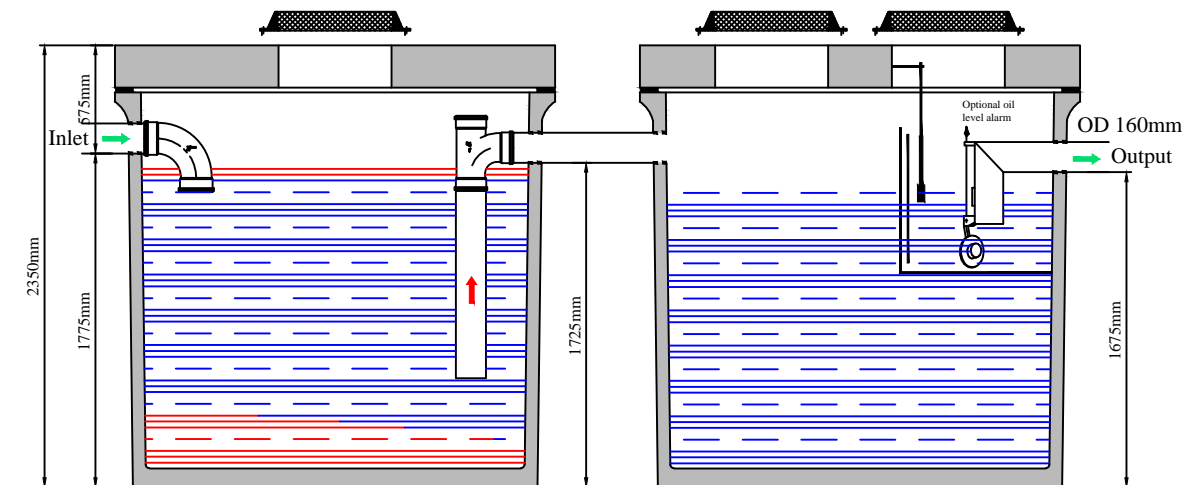

Notes:

This drawing is ©. All rights reserved.

Note: Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.

Note: Specify any specific requirements prior to ordering. All civil works by customer.

Note: Do not scale from this drawing. Only for illustration purposes.

Tank Type: 2C Fourcourt Interceptor

Tank Size: 4930mm x 2340mm (Overall)

Height: 2350mm

Volume: 16000 liters

Weight: 4500kg (Each, Ex. Lid)

(Tank Dim: ± 20mm. Weight: ± 30Kg.)

10 l/s flow
555m sq. coverage
1,000 lit. silt capacity
7,600 lit. emergency oil retention.



Clara Road, Tullamore, Co. Offaly, Ireland
 Tel: 057 9326000 info@molloyprecast.com
 Fax: 057 9326060 www.molloyprecast.com

Title: FC-NS-10-CC

Fourcourt Interceptor

Date: June 2012

Drg. No.: FC-NS-10-CC-00

Drawn By: SC