



Forecourt Class 1 En 858 Industrial Interceptor FC - NS - 6 - CH Buderus

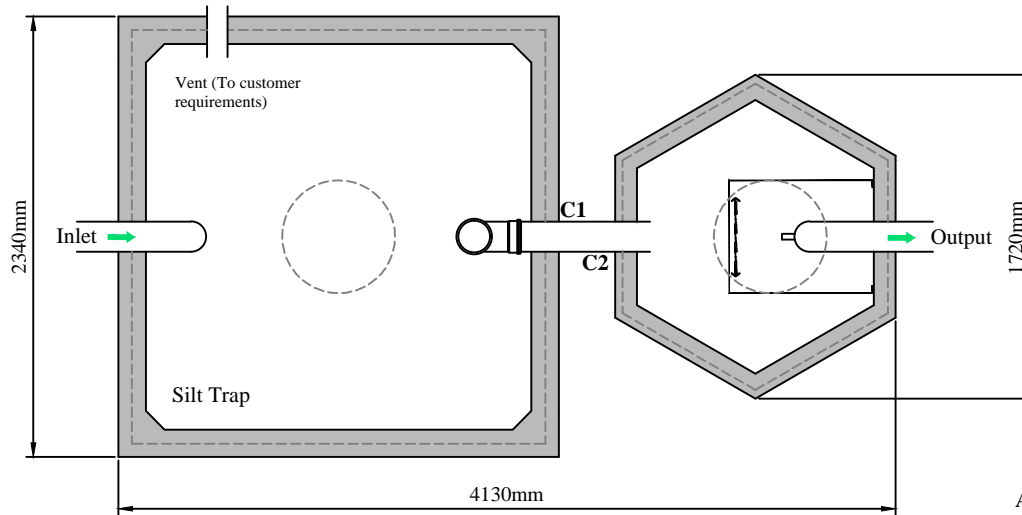

All the tanks must be placed on a perfectly level and firm suitable base.

Typical layout, variations as required per customer.

An anti-syphon vent is required for long run outflows

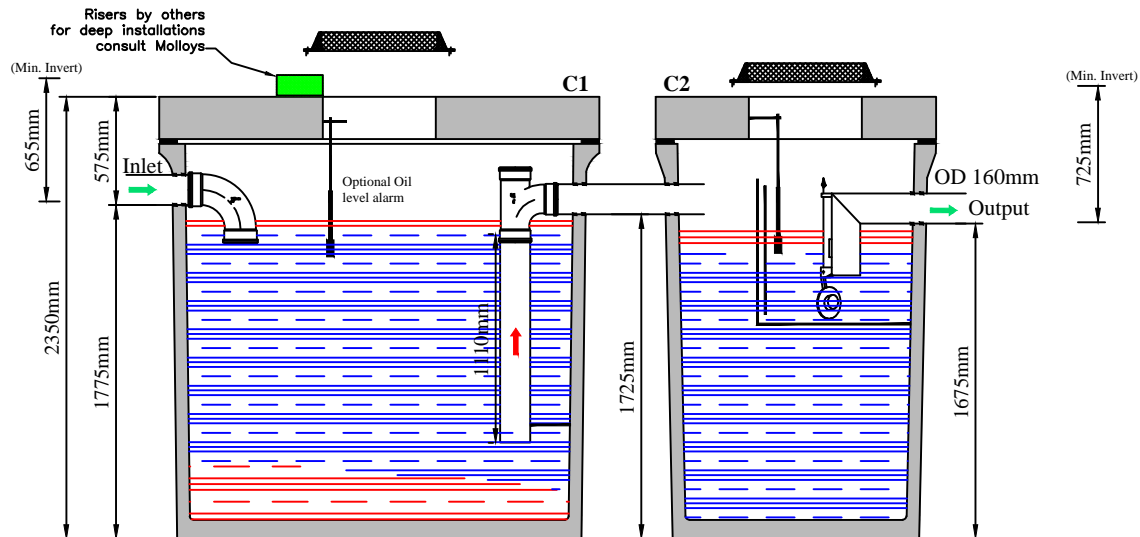

Notes:

This drawing is ©. All rights reserved.

Note: Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.

Note: Specify any specific requirements prior to ordering. All civil works by customer.

Note: Do not scale from this drawing. Only for illustration purposes.

Tank Type: CH Forecourt Interceptors

Tank Size: 4130mm x 2340mm (Overall)

Height: 2350mm

Volume: 10500 liters

Weight: C:4500kg. H:1500kg (Ex. Lid)

(Tank Dim: ± 20mm. Weight: ± 30Kg.)

6 l/s flow.
333m sq. coverage.
800 lit. silt capacity.
7,600 lit. emergency oil retention.



Clara Road, Tullamore, Co. Offaly, Ireland
 Tel: 057 9326000 info@molloyprecast.com
 Fax: 057 9326060 www.molloyprecast.com

Title: FC-NS-6-CH

Fourcourt Interceptor

Date: June 2012

Drg. No.: FC-NS-6-CH-00

Drawn By: SC