



**Full Retention Interceptor Class 1 EN 858 FR-NS-10-C Buderus Volume 8,000 lit.**

**10 l/s flow  
555m sq. coverage  
4,000 lit. silt capacity  
800 lit. oil retention**

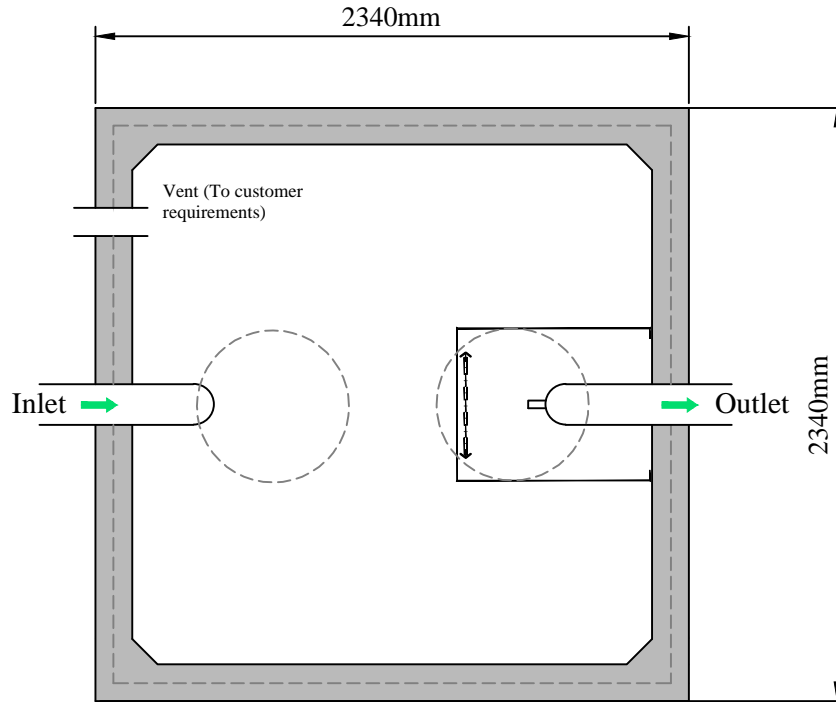

All the tanks must be placed on a perfectly level and firm suitable base.  
Typical layout, variations as required per customer.

An anti-syphon vent is required for long run outflows

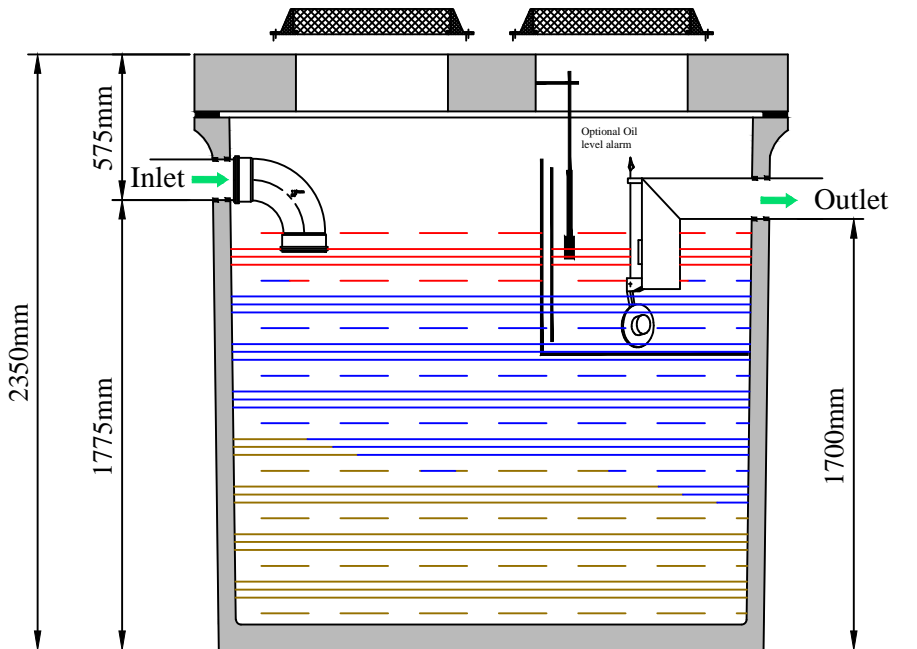

Clara Road, Tullamore, Co. Offaly, Ireland  
Tel: 057 9326000 info@molloyprecast.com  
Fax: 057 9326060 www.molloyprecast.com

**Note:** Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.  
**Note:** Specify any specific requirements prior to ordering. All civil works by customer.  
**Note:** Do not scale from this drawing. Only for illustration purposes.

<b>Tank Type:</b> C Full Retention Interceptor	<b>Title:</b> FR-NS-10-C
<b>Tank Size:</b> 2340mm x 2340mm (Overall)	Full Retention Interceptors
<b>Height:</b> 2350mm	<b>Date:</b> June 2012
<b>Volume:</b> 8000 liters	<b>Drg. No.:</b> FR-NS-10-C-00
<b>Weight:</b> 4500kg (Ex. Lid)	<b>Drawn By:</b> SC
<b>(Tank Dim: ± 20mm. Weight: ± 30Kg.)</b>	This drawing is ©. All rights reserved.