



**Full Retention Class 1 EN 858 FR-NS-10-HC Buderus Volume 10,500 lit**

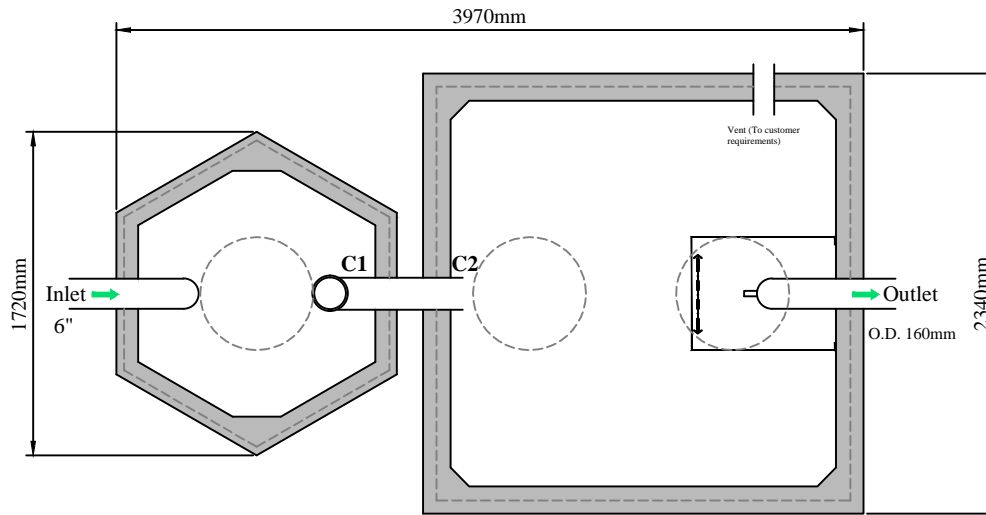

All the tanks must be placed on a perfectly level and firm suitable base.

Typical layout, variations as required per customer.

An anti-syphon vent is required for long run outflows

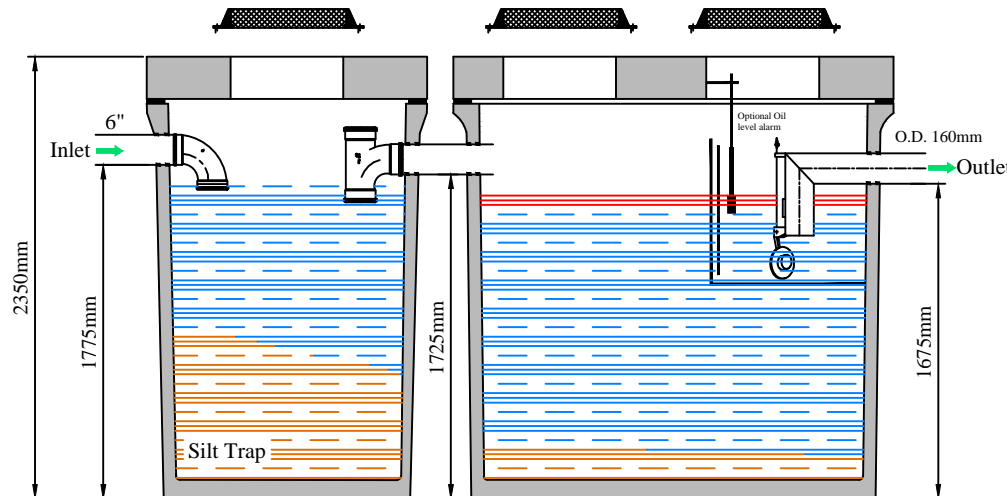

**Notes:**

This drawing is ©. All rights reserved.

**Note:** Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.

**Note:** Specify any specific requirements prior to ordering. All civil works by customer.

**Note:** Do not scale from this drawing. Only for illustration purposes.

**Tank Type:** HC Full Retention Interceptor

**Tank Size:** 3970mm x 2340mm

**Height:** 2350mm

**Volume:** 10500 liters

**Weight:** H: 1500kg, C: 4500kg (Ex. Lid)

**(Tank Dim: ± 20mm. Weight: ± 30Kg.)**

**10 l/s nominal flow**  
**555m sq. coverage**  
**5,000 lit. silt capacity**  
**1,000 lit. emergency oil retention.**



Clara Road, Tullamore, Co. Offaly, Ireland  
 Tel: 057 9326000 info@molloyprecast.com  
 Fax: 057 9326060 www.molloyprecast.com

**Title:** FR-NS-10-HC

Full Retention Interceptor

**Date:** June 2012

**Drg. No.:** FR-NS-10-HC-00

**Drawn By:** SC