



## Full Retention Class 1 EN 858 FR-NS-20-CC Buderus Volume 16,000 lit

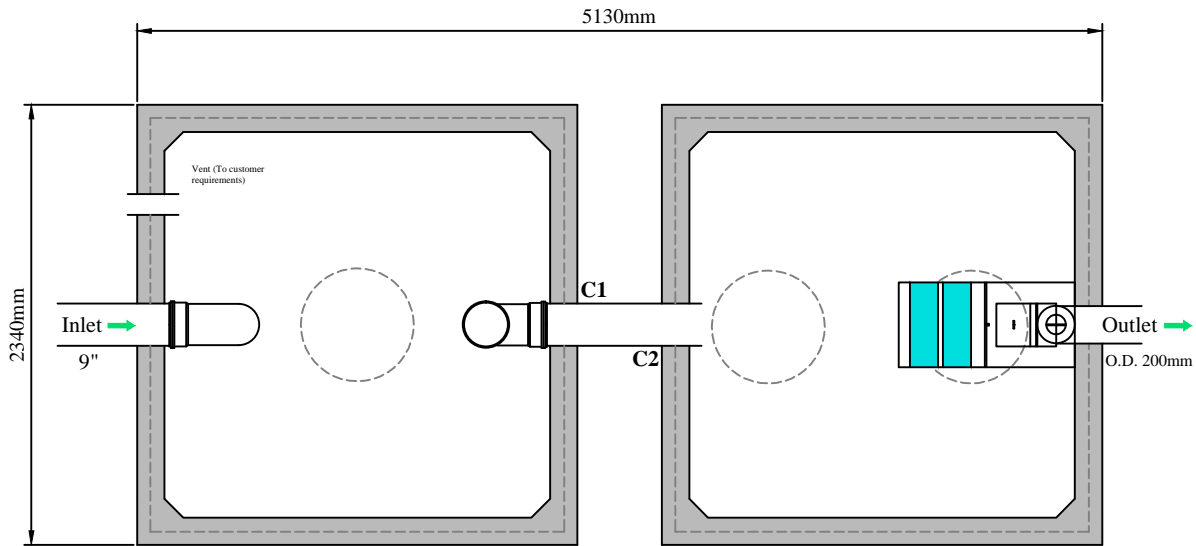

All the tanks must be placed on a perfectly level and firm suitable base. Typical layout, variations as required per customer.

An anti-syphon vent is required for long run outflows

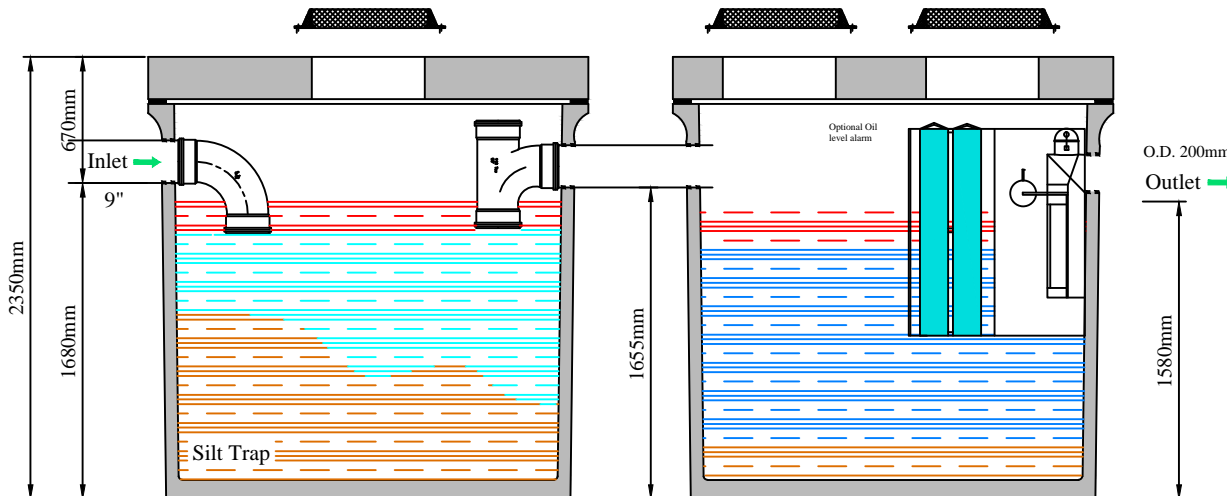

### Notes:

This drawing is ©. All rights reserved.  
**Note:** Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.  
**Note:** Specify any specific requirements prior to ordering. All civil works by customer.  
**Note:** Do not scale from this drawing. Only for illustration purposes.

**Tank Type:** 2C Full Retention Interceptor  
**Tank Size:** 5130mm x 2340mm  
**Height:** 2350mm  
**Volume:** 16000 liters  
**Weight:** 4500kg (Each, Ex. Lid)  
**(Tank Dim: ± 20mm. Weight: ± 30Kg.)**

**20 l/s nominal flow**  
**1,110m sq. coverage**  
**5,000 lit. silt capacity**  
**1,800 lit. emergency oil retention.**



Clara Road, Tullamore, Co. Offaly, Ireland  
 Tel: 057 9326000 info@molloyprecast.com  
 Fax: 057 9326060 www.molloyprecast.com

**Title:** FR-NS-20-CC  
**Full Retention Interceptor**  
**Date:** June 2012  
**Drg. No.:** FR-NS-20-2C-00  
**Drawn By:** SC