



Full Retention Class 2 EN 858 FR-NS-20-CCC Volume 24,000 lit

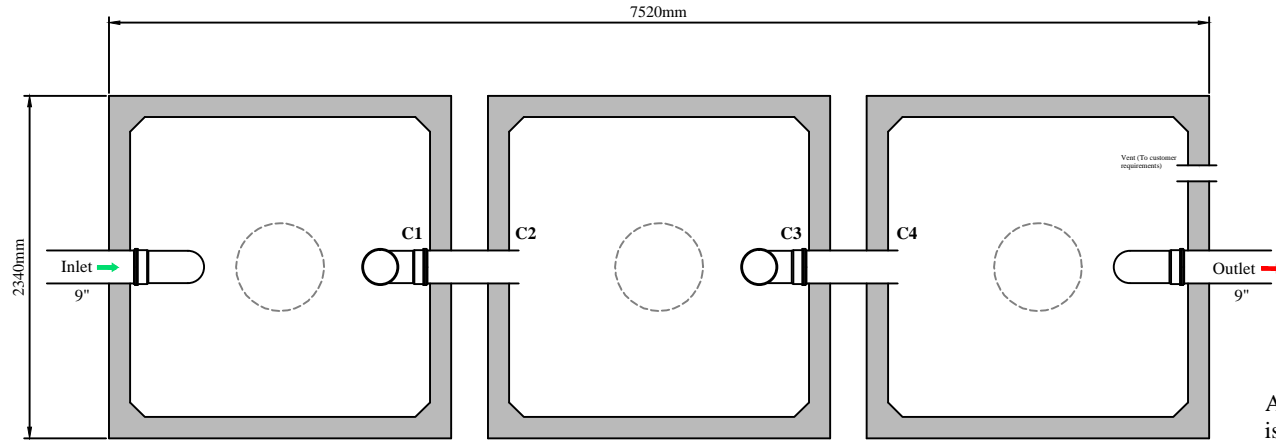

An anti-syphon vent is required for long run outflows

All the tanks must be placed on a perfectly level and firm suitable base.
Typical layout, variations as required per customer.

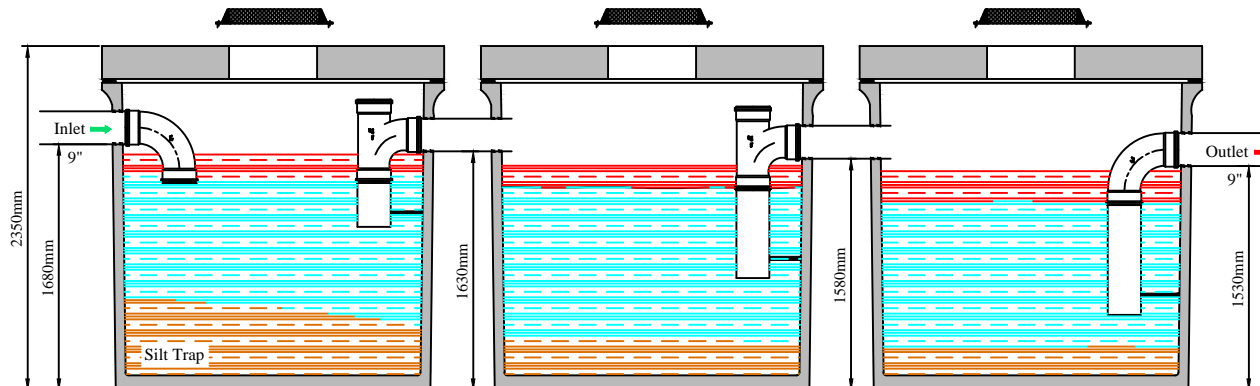

Notes:

This drawing is ©. All rights reserved.

Note: Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.

Note: Specify any specific requirements prior to ordering. All civil works by customer.

Note: Do not scale from this drawing. Only for illustration purposes.

Tank Type: 3C Full Retention Interceptor

Tank Size: 7520mm x 2340mm

Height: 2350mm

Volume: 24000 liters

Weight: 4500kg (Each, Ex. lid)

(Tank Dim: ± 20mm. Weight: ± 30Kg.)

20 l/s nominal flow
1,110m sq. coverage
6,000 lit. silt capacity
4,000 lit. emergency oil retention.



Clara Road, Tullamore, Co. Offaly, Ireland
Tel: 057 9326000 info@molloyprecast.com
Fax: 057 9326060 www.molloyprecast.com

Title: FR-NS-20-CCC

Full Retention Interceptor

Date: June 2012

Drg. No.: FR-NS-20-CL2-3C-00

Drawn By: SC