



Full Retention Class 1 EN 858 FR-NS-50-CC Ortnr Volume 16,000 lit

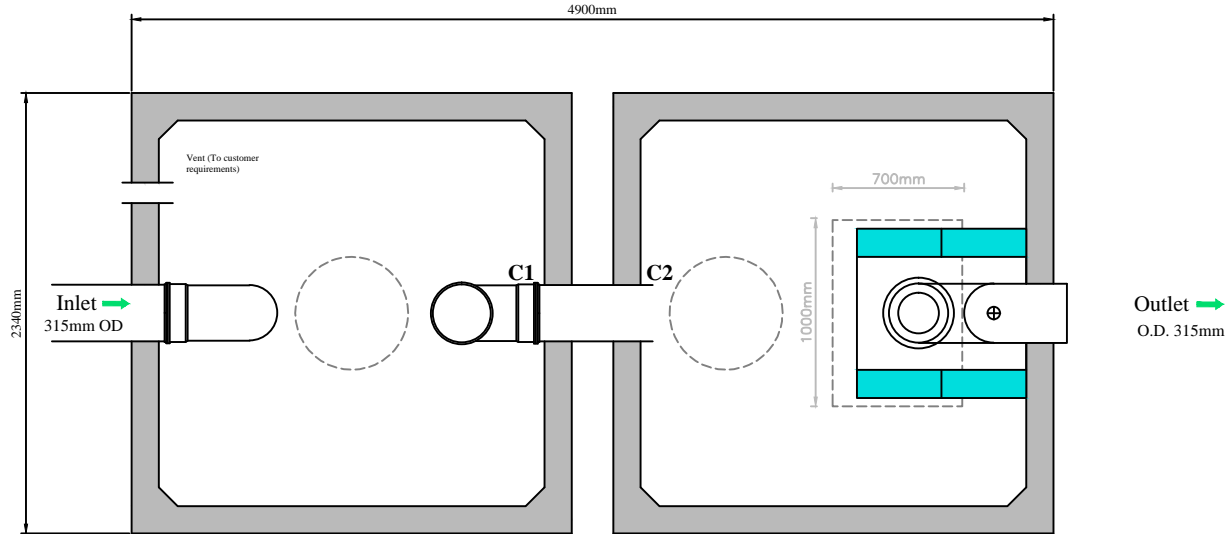

All the tanks must be placed on a perfectly level and firm suitable base.
Typical layout, variations as required per customer.

An anti-syphon vent is required for long run outflows

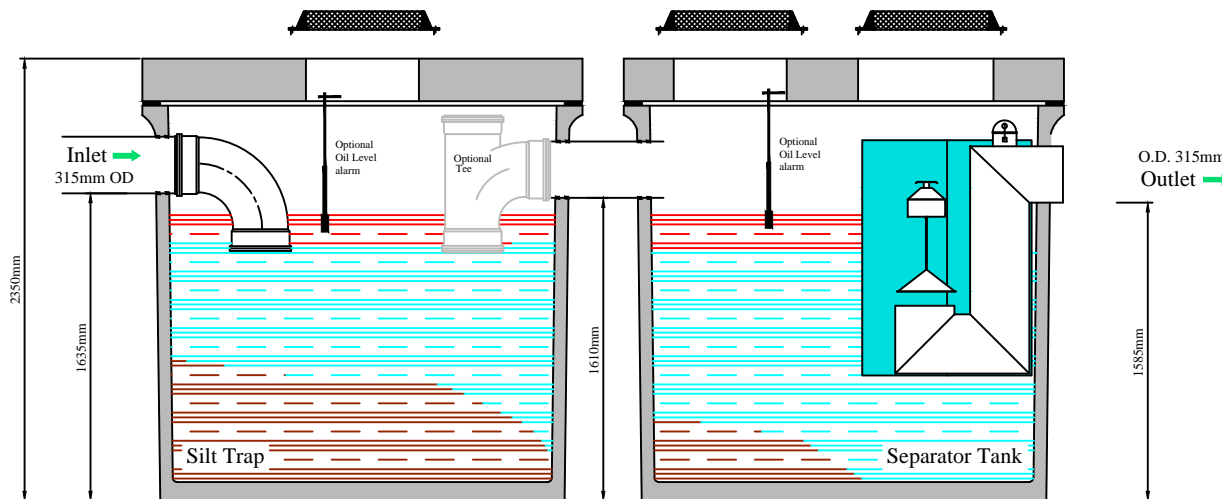

Notes:

This drawing is ©. All rights reserved.
Note: Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.
Note: Specify any specific requirements prior to ordering. All civil works by customer.
Note: Do not scale from this drawing. Only for illustration purposes.

Tank Type: 2C Full Retention Interceptor

Tank Size: 4900mm x 2340mm

Height: 2350mm

Volume: 16000 liters

Weight: 4500kg (Each, Ex. Lid)

(Tank Dim: ± 20mm. Weight: ± 30Kg.)

50 l/s nominal flow
2,773m sq. coverage
2,000 lit. silt capacity
4,000 lit. emergency oil retention.



Clara Road, Tullamore, Co. Offaly, Ireland
Tel: 057 9326000 info@molloyprecast.com
Fax: 057 9326060 www.molloyprecast.com

Title: FR-NS-50-CC

Full Retention Interceptor

Date: June 2012

Drng. No.: FR-NS-50-2C-00

Drawn By: SC