

16 PE Wastewater Treatment System - 2S+ Tanks (14,000 L)

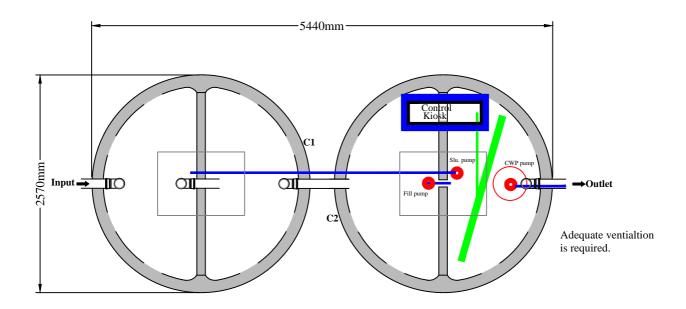

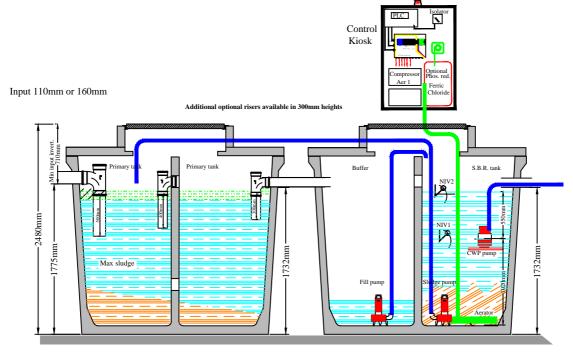

Connection to percolation area must insure that no runback is possible

Primary & Sludge

Buffer SBR Reactor

A good firm, rock free, level base is required. Where ground is unsuitable, a C30 concrete base may be required.



Clara Road, Tullamore, Co. Offaly, Ireland Tel: 057 9326000 info@molloyprecast.com Fax: 057 9326060 www.molloyprecast.com Note: Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.

Note: Specify any specific requirements prior to ordering. All civil works by

customer.

Note: Do not scale from this drawing.
Only for illustration purposes.

Tank Type: 2S+

Tank Size: 5440mm x 2570mm (Overall) Height: 2480mm (Each)

Volume: 14000 litres (7000 litres Each) **Weight:** 7100 kg (Each)

(Tank Dim: ± 20 mm. Weight: ± 30 Kg.)

Title: Wastewater Treatment System - 2S+

Population Equivilant: 4-16 PE

Date: June 2012

Drg. No.: WWT-2S+-16PE-00

Drawn By: MFC

This drawing is ©. All rights reserved.