



Fats & Grease Trap - 2H+ Tanks (7,000 L) - IS EN 1825 Compliant

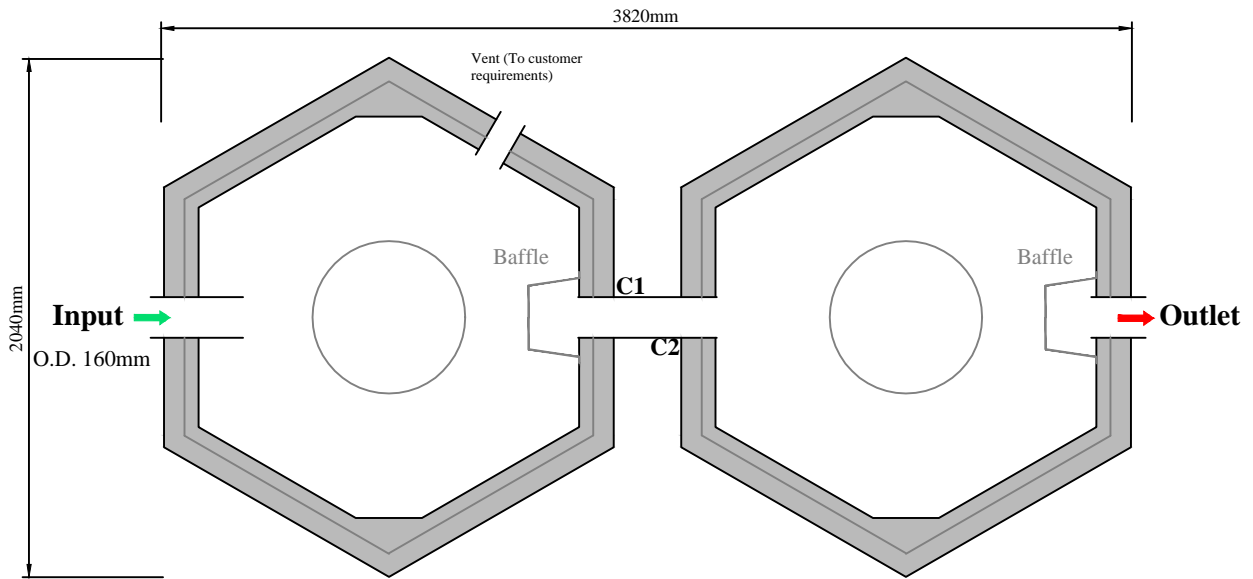

An anti-syphon vent is required for long run outflows

15 lit./sec nominal flow @ $\leq 60^{\circ}\text{C}$
 1,200 lit. Grease retention first tank
 1,000 lit. Grease retention second tank
 1,200 lit. Sludge capacity

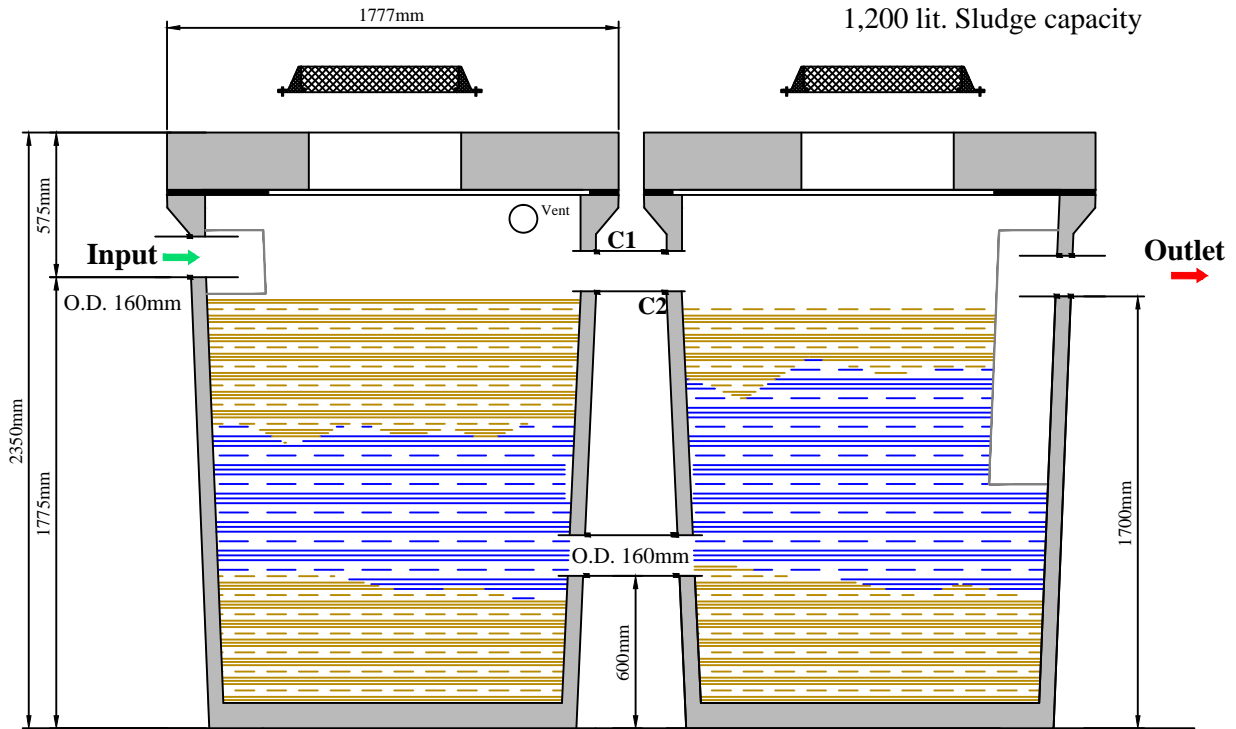

A good firm, rock free, level base is required.



Clara Road, Tullamore, Co. Offaly, Ireland
 Tel: 057 9326000 info@molloyprecast.com
 Fax: 057 9326060 www.molloyprecast.com

Note: Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time.
 Note: Specify any specific requirements prior to ordering. All civil works by customer.
 Note: Do not scale from this drawing. Only for illustration purposes.

Tank Type: 2H+
 Size: 3820mm x 2040mm (Overall)
 Height: 2350mm (Lids may vary)
 Volume: 7000 liters (3500 liters each)
 Weight: 1800kg (Ex. lid)
 (Tank Dim: $\pm 20\text{mm}$. Weight: $\pm 30\text{Kg}$.)

Title: Grease Trap 2H+ NS-15
 Nominal Size: 15 liters/sec
 Date: June 2012
 Drg. No.: FG-NS-15-00
 Drawn By: MFC
 This drawing is ©. All rights reserved.